

BESTTEC® PS 5015

Product description

Hotmelt pressure sensitive adhesive with excellent adhesion to various substrates; high shear adhesion at elevated temperatures; recommended for slot die coaters.

Suggested use

Permanent tapes; double side coated mounting tapes and films.

Application advice


Novamelt® PS 5015 can be coated at 160 – 180 °C.

Physical properties

Softening point (ASTM D36): 95 – 100 °C

Color: amber

Viscosity (D= 92.7 s⁻¹; Anton Paar MCR 300):

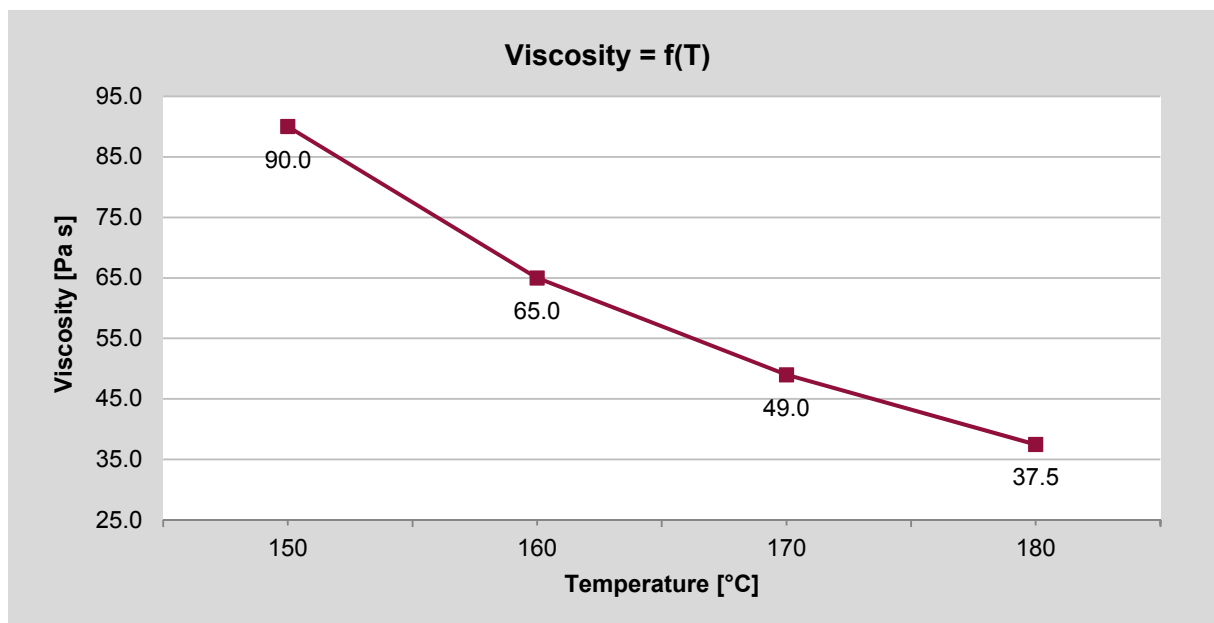

BESTTEC® PS 5015

Pressure sensitive properties of a 50 g/m²-coating on 23 µm polyester film:

180° Peel adhesion to steel (AFERA 4001)


after 10 min: 55 – 60 N/inch

after 24 h: 55 – 60 N/inch



Loop Tack on glass (FTM 9)

38 – 44 N/inch



Rolling Ball (PSTC 6)


approx. 50 cm



Shear adhesion to steel (AFERA 4012)


23 °C: 40 N/inch²

40 °C: 10 N/inch²



Shear adhesion failure temperature on steel (SAFT)

0.5 °C/min; 0.5 kg/inch²: approx. 67 °C



Packaging

4 kg, 8 kg and 20.8 kg blocks in siliconized boxes, 180 kg fibre drums

Shelf life and storage

The product can be stored two years – starting from production date – in its original package under clean and dry conditions and protected from direct sunlight. Average storing temperature is suggested to be 25 °C or below. Storage temperature should not exceed 40 °C.